



SWING GATE TURNSTILES GV-3000 Series

With motorized function in one direction, GateSet **Classic Line** GV-3000 Series Motorized VIP Swing Gate Turnstiles provide an alternative to regulate pedestrian traffic. Thanks to its compact design and 90 cm arm length which is compatible with international wheelchair standards, GV-3000 is an ideal solution to provide controlled passage for VIP and physically handicapped people. Thanks to its aesthetic and user-friendly design, GV-3000 Series Swing Gates are ideal for shopping malls, supermarkets, fitness/wellness centers.

ClassicLineGV-3000Datasheet v.2.0

Functional Highlights



Motorized Movement



Unidirectional



Indoor



Security / Comfort



30/min

30 Passages / min

Usage Areas


Access Control Access Restriction
Business Centers
Government Offices
Sport Centers
Industrial Plants

Featured Characteristics

Classic Design Aesthetic outfit with satin finishing
Reliable Low maintenance requirement, long product life
Robust Steel profile swing arm
Functional Unidirectional motorized movement
Flexible Ease of integration with all access control equipment through its electronic control card

ClassicLineGV-3000Datasheet v.2.0

Drawings and Dimensions*

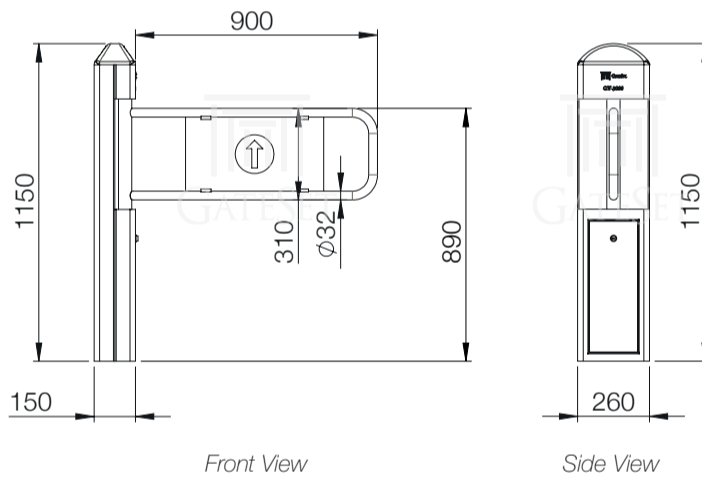

Subject to change depending on design or project needs without prior notice

Technical Specifications*

MATERIAL - MAIN BODY	1.5 mm 304 grade stainless steel
MATERIAL - SWING ARM	Steel profile frame with 32 mm diameter
TREATMENT - OTHER PARTS	All other parts are coated against corrosion
DIMENSIONS (mm)	260 x 1050 x 1150 (WxLxH)
SWING ARM LENGTH (mm)	900
OPERATING VOLTAGE	115-240 V AC / 24V DC - 50-60 Hz
NOMINAL / MAX. CURRENT	100 mA / 500 mA
POWER CONSUMPTION	30 W
OPERATING TEMPERATURE	-20 °C / + 70 °C
ACCESS CONTROL	Microprocessor based control for granted access. Easy integration with all kind of access control equipment
POSITION DETECTION	Position detection with two separate micro-switches at mechanics
DIRECTIONAL MODE	One directional motorized operation
ROTATION CONTROL	Motion start and stop are controlled by PWM microprocessor
CAPACITY	Handling more than 30 passengers per minute
DESIGN	Modular design providing ease of installation and part replacement
INSTALLATION	Stainless steel modular installation platform/base
OPERATION SAFETY	Electrical and mechanical safety for all component. To avoid injuries, all corners and sides are rounded
ANTI-PANIC FEATURE	In case of emergency, arm releases itself with excessive force, providing ease of evacuation
ACCESSORIES	Button Control (standard), Remote Control Receiver and Transmitter (optional)
CERTIFICATION	ISO 9001:2008
WARRANTY	2 Years

* Subject to change depending on design or project needs without prior notice

ClassicLineGV-3000Datasheet v.2.0

Optional Accessories



Radar Sensor

Integrated sensor automatically opens the gate wing when a passanger is detected within the radar area



Button Control Panel

Designed for ease of operation from reception or supervision desks, remote or wired options



Photocell Sensor

Gate wing is automatically opened when the Photocell Sensor beam is interrupted by a passanger



Stand-Alone Card Reader

For sites without Access Control System, seamless stand-alone card reader is available

Finishing Options

Standard 304 Stainless Steel, Satin Finishing
Optional 316 Grade Stainless Steel, Satin Finishing